



Generator Control Package

A Complete Genset Management System

DAY TANK EQUIPMENT



ATI-1503-4, ATI-1503-R


ATI-5020-4



SUPPLY TANK EQUIPMENT



ATI-DM335

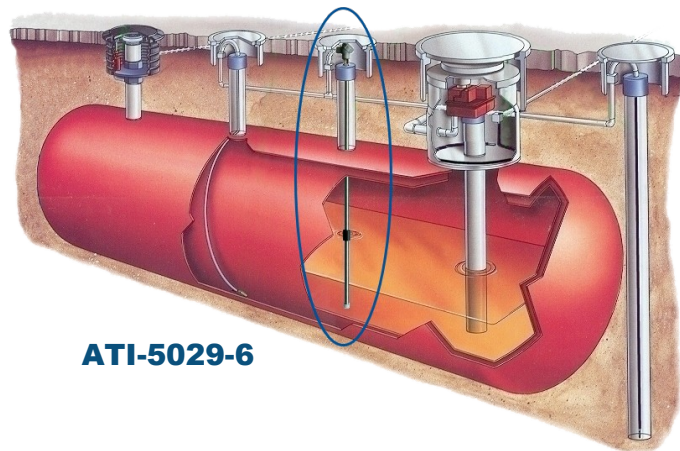

ATI-5029-6

This complete solution provides all the equipment you need to monitor and operate your day tank and supply tank for a Genset application.

From \$2900

Call us for more information about this package and our local distributors.



A.T.MONITORS, A division of Armstrong Technologies Inc.

14 Birch Drive, Kemptville, Ontario, K0G 1J0, CANADA

Phone: 613-258-5225 · Fax: 613-258-2698

E-mail: info@atmonitors.com · Internet: www.atmonitors.com

ATI-5020 LIQUID LEVEL PROBE



This stainless-steel, explosion-proof probe comes with three (3) floats and four (4) switch points for monitoring liquid level changes in day tanks. The probe is preset at the factory to react on high-level (overflow), pump off, pump on, and low-level (empty) conditions.

Output: Normally Open

Operating Temperature: -40 to +80 °C (-40 to +176 °F)

Power Requirements: 12 VDC @ 20 mA max.

Dimensions: For this package, probe available in 4' length

Part Numbers: ATI-5020-4 (other sizes also available), ATI-5020-FL, ATI-5020-SP

ATI-1503 ANNUNCIATOR PANEL



The ATI-1503 Multi-Point Annunciator provides liquid level notifications when used with the ATI-5020 explosion-proof multi-level probe.

Operating Temperature: 0 to +40 °C (+32 to +104 °F)

Power Requirements: 120VAC, 60Hz @ 1 Amp max.

Relay Contacts: Four DPDT relays, contacts rated for 15A @ 120VAC

Dimensions: 8.5"W x 8.2"H x 4"D

Part Numbers: ATI-1503-4, ATI-1503-R

ATI-5029 LIQUID LEVEL MEASUREMENT PROBE



The ATI-5029 Liquid Level Measurement Probe provides continuous monitoring of liquid level in increments of one inch or 2 cm, allowing accurate depth measurement. This sensor is designed for use with the ATI-DM335 display module for monitoring fuel levels in supply tanks.

Output: 4 to 20 mA

Operating Temperature: -40 to +60 °C (-40 to +140 °F)

Power Requirements: 12 VDC @ 20 mA max.

Dimensions: For this package, probe available in 6' length

Part Numbers: ATI-5029-6 (other sizes also available)

ATI-DM335 DISPLAY MODULE



The ATI-DM335 is a compact, DIN rail mountable display module which provides a continuous liquid level readout. It is designed for use with the ATI-5029 explosion-proof liquid level measurement probe. The module operates on a low voltage DC power supply.

Operating Temperature: 0 to +50 °C (+32 to +122 °F)

Power Requirements: 12 VDC @ 200 mA max.

Dimensions: 2.0"W x 3.0"H x 3.9"D

Part Numbers: ATI-DM335, ATI-DM335-PS, ATI-AK125